


## 通用型化学管 A4-052

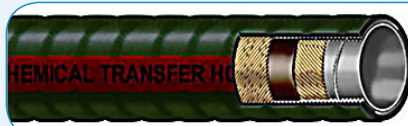

### 应用:

■ 新技术产品，可在有压力，重力或吸引作用下，输送目前大多数的通用工业化学品

### 技术参数:

- 内层: Pliosyn超高分子量聚乙烯
- 增强层: 合成纤维缠绕, 带2根螺旋钢丝
- 外层: Green Versigard 带有明亮的橙色直条纹的合成橡胶, 表面有褶皱 (环裹压印而成)
- 工作温度: -40°C 至+100°C

### Applications:

■ A significant improvement to our chemical hose line. It handles the majority of common industrial chemicals in pressure, gravity flow and suction service

### Technical description:

- Inner Tube: Pliosyn™ Ultra-High Molecular Weight Polyethylene (UHMWPE)
- Reinforcement: Spiral-plyed synthetic fabric with double wire helix
- Cover: Green Versigard® synthetic rubber with bright orange longitudinal stripe, corrugated (wrapped impression)
- Temperature Range: -40°F to 212°F (-40°C to 100°C)

## 通用型化学管 FABCHEM

产品编码 No.	内径		外径	工作压力	耐负压	重量	包装长度
	in	mm	mm	bar	in.	kg/m	m
A4-052-0500	1/2	12.7	24.1	13.8	29	0.49	30.48
A4-052-0750	3/4	19.1	31.0	13.8	29	0.68	30.48
A4-052-1000	1	25.4	37.3	13.8	29	0.89	30.48
A4-052-1250	1-1/4	31.8	43.9	13.8	29	1.09	30.48
A4-052-1500	1-1/2	38.1	50.0	13.8	29	1.25	30.48
A4-052-2000	2	50.8	64.8	13.8	29	1.82	30.48
A4-052-2500	2-1/2	63.5	79.8	13.8	29	2.65	30.48
A4-052-3000	3	76.2	92.2	13.8	29	3.14	30.48
A4-052-4000	4	101.6	118.6	13.8	29	4.18	30.48
A4-052-6000	6	152.4	175.0	13.8	29	8.90	30.48

**blueFuture**

您身边的工业专家