


# 超柔食品排吸管

## A1-003

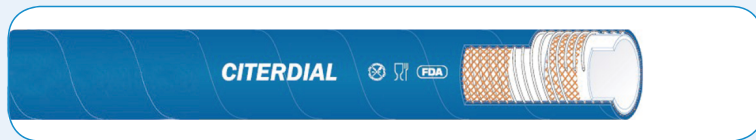

### 应用:

特别适用于输送牛奶，主要用于奶源收集站、奶罐车、奶品加工及灌装设备等工作场合。也可用于其他流体食品的排吸，如红酒、啤酒、果酒、果汁、食醋、96%浓度酒精等。

### 优点:

- 具有非常好的柔韧性
- 白色光滑食品级内壁，能有效抑制细菌滋长
- 符合法国、欧洲、美国等地区最严格的食品级标准
- 可用清洁剂或蒸汽消毒（蒸汽温度不超过+110°C，最大可持续十分钟）
- 具有防扭结、耐磨损、耐油污等特性
- 不含phthalate（邻苯二甲酸酯）

### 技术参数:

- 内层：食品级天然合成橡胶，白色，光滑
- 增强层：高强度合成线绳加螺旋钢丝增强
- 外层：抗老化天然合成橡胶，耐磨损，蓝色，表面布纹
- 工作温度：-30°C至+80°C

### 适用标准及认证:

- EU 1935/2004, FDA 21CFR 177.2600, BFR

### Applications:

For milk handling: tanker lorries for milk collection and transport, dairy unloading bays and stationary equipment, processing and filling plant. Also for transfer of other liquid foodstuffs such as wine, beer, cider, fruit juice, vinegar and alcohol up to 96 %, with exception of fatty foodstuffs and oils.

### Advantages:

- Extremely flexible to accept the smallest bending radius without kinking
- Smooth, seamless, white tube that does not propagate bacterial growth and complies with the most stringent French, European, and American requirements for foodstuff handling
- Unaffected by changes in temperature, the advantage of rubber over PVC
- Resistant to most common cleaning process, either with detergents or steam at temperatures up to 110 °C(during 10 minutes max)
- Non-marking, abrasion resistant cover. Contains no phthalate

### Technical description:

- Tube: Food grade quality NR, white, smooth
- Reinforcement: Synthetic textile with embedded steel helix
- Cover: NR, blue, fabric impression
- Temperature range: - 30 °C to + 80 °C

### Standard/Approval:

- EU 1935/2004, FDA 21CFR 177.2600, BFR

## 超柔食品排吸管

## A1-003

产品编码 No.	内径 in	mm	外径 mm	工作压力 bar	爆破压力 bar	耐负压 bar	弯曲半径 mm	重量 kg/m	包装长度 m
A1-003-1000	1"	25.0	36.0	6	18	0.9	50	0.70	40
A1-003-1250	1-1/4"	32.0	43.0	6	18	0.9	64	0.82	40
A1-003-1500	1-1/2"	38.0	49.0	6	18	0.9	76	1.14	40
A1-003-1580	1-9/16"	40.0	51.0	6	18	0.9	80	1.27	40
A1-003-1770	*	45.0	56.0	6	18	0.9	90	1.38	40
A1-003-2000	2"	51.0	63.0	6	18	0.9	102	1.79	40
A1-003-2090	*	53.0	65.0	6	18	0.9	106	1.85	40
A1-003-2360	2-3/8"	60.0	72.0	6	18	0.9	120	2.09	40
A1-003-2500	2-1/2"	63.0	75.0	6	18	0.9	126	2.17	40
A1-003-2760	*	70.0	83.5	6	18	0.9	140	2.62	40
A1-003-3000	3"	76.0	89.5	6	18	0.9	152	3.03	40
A1-003-4000	4"	100.0	114.0	6	18	0.9	350	3.67	40
A1-003-5000	5"	125.0	145.5	6	18	0.9	450	6.05	20
A1-003-6000	6"	150.0	171.5	6	18	0.9	530	7.02	20

